


JuiceBar®

LEVEL 2 – 32A, 40A, 48A, 80A

JuiceBar Gen 3 Technical Specifications

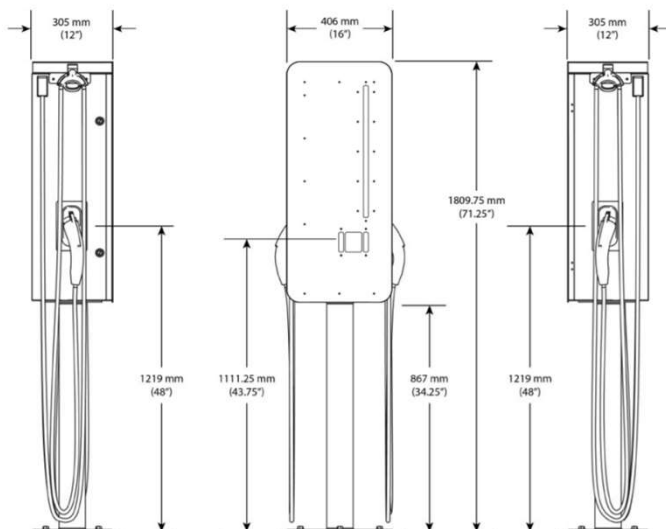

Model #	Description
JB3.0-XX1	Single Connector Charger
JB3.0-XX2	Dual Connector Charger

Certifications

TUV Rheinland
UL 2231-1, UL 2231-2, UL 2594

AC Input

Voltage: 208/240 VAC
Breaker: Rating 40A-100A
Single Connector: 3 Wire (L1, L2 & G)
Double Connector: 5 Wire (L1, L1, L2, L2 & G)
Voltage: 208/240 VAC
Breaker: Rating 100A
Double Connector: 3 Wire (L1, L2 & G)

AC Input Per Connector

7.7 kW-19.2kW at 240VAC
6.6 kW – 16.6 at 208VAC

Operating Temperature

- 25° C to +50° C
- 13° F to +122° F

Communications

Cellular 4G, 5G, or Ethernet

Protocol

OCPP 1.6J, OCPI

Dimensions

71.25" Total Height with Pedestal
36.5" Total Height w/out Pedestal
16" Width Without Connectors
12" Depth

Cord Length

18 feet (standard), Cable Retractor Standard

Connectors

SAE J1772 Type 1

Enclosure

Type 3R Aluminum

Options

Wall Bracket
Pedestal Mount
Branded Door Graphics
GFCI Outlet & Bike Lock Loop

User Interface

LED Indicators
RFID Card Reader (WEX compatible)